


Junco 250 mm

■ 08.8595.AAA - Black

Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

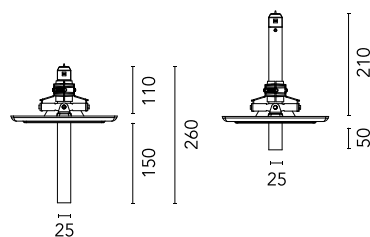

Main specifications

Mounting	Ceiling recessed	Dimmable	No
Environment	Indoor dry location	Autoprotected Lamp	No
LED type	Power LED	Source Power (W)	2.2W
Lamp category	LED	Source Flux (lm)	182
Ilcos	No	System Flux (lm)	130

Optical

Lighting Type	Direct
Lighting distribution	Symmetric
CCT (K)	2700K
CRI>	90
Cold Beam Lighting	No
Beam angle C0-180 (°)	15

Electrical

Main Voltage (Vac)	3,00
Driver	Remote excluded
Dimmable	No
Dimmable type	Non Dimmable, Dimmable Push, Dimmable 1-10V
Emergency Type	No

Physical

Colour	Black	Recessed depth (mm)	210
Trim	No	Length (mm)	250
Orientations	Adjustable	Net weight (Kg)	0.13
Rotation (°)	360	IP	20
Longitudinal Tilting	20	IP external	20

Note

Soft Plate to be order separately.

Junco 250 mm



Continuous current power supply.
230/240V - 50/60Hz. Adjustable
Current 350mA - 17W / 500mA -
24W / 700/ 750 mA - 32W switch by
trailing and leading edge dimming,
mains dimming or push dimming
60.8534

Not dimmable continuous current
power supply of 17W, 700 mA -
110/240V - 50/60Hz
60.8655

Continuous current power supply
of 25W, 110/240V - 50/60Hz with
power current selected through
adjustable 350 mA-18W / 400 mA -
21W / 500mA - 25W / 600mA - 30W
/700/750/900 mA - 32W switch. 1-
10V or push dimming,
synchronisation cables not
included.
60.8533